


joovy®

Bicycoo BMX Instruction Manual 0014X Series



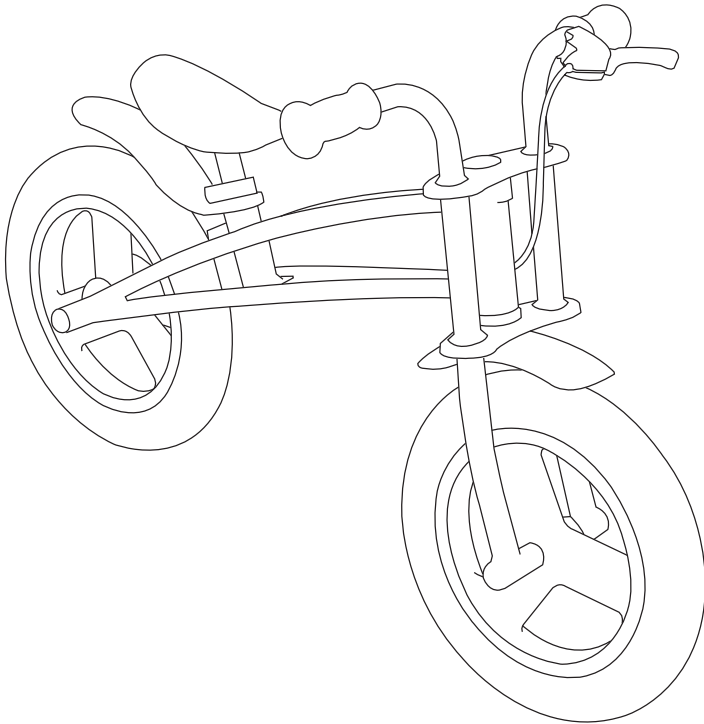

WARNINGS

Please read this instruction manual completely before using this product. Keep these instructions for future reference.


- TO AVOID SERIOUS INJURY
- Continuous adult supervision is required.
- Never use near motor vehicles.
- Never use near streets, swimming pools, hills, steps, or sloped driveways.
- Always wear shoes when using the balance bike.
- Allow only one rider.
- Minimum age of rider shall be 1 year.
- Maximum age of rider shall be 5 years.
- Maximum weight of rider shall be 66 lbs.
- Rider should always wear a properly fitted helmet that complies with Federal helmet (16CFR1203) requirements.

Please do not return this product to the store

If you experience any difficulty with the assembly or use of this product, or if you have a question regarding these instructions, please contact our Customer Service Department at (877) 456-5049 between the hours of 8:30 am and 5:00 pm Central Time.

Please note: Styles and colors may vary.

Assembling and Using your Balance Bike

 **To ensure safe operation of your balance bike, please follow these instructions carefully.**

Unpacking the Product

- Carefully remove all parts from the box and polybag.
- Identify the parts (front fork and wheel, body/handlebar, hexagonal screw, washer, 5mm Allen wrench, and documents [not shown]) with the pictures in Figures 1.
- Discard all packaging materials properly.
- Remove the plastic coverings from any areas of the product and discard also.
- DO NOT allow children to play with any packaging materials.

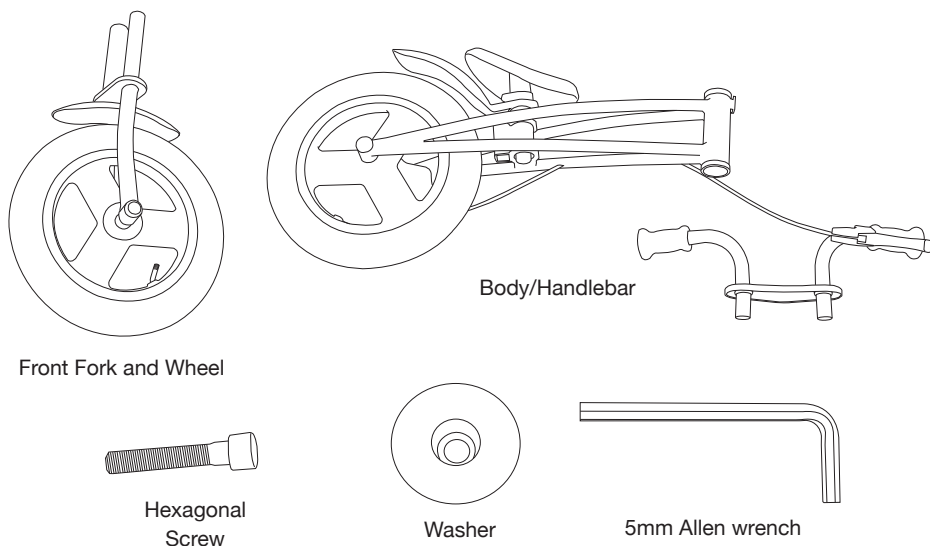


Figure 1

WARNING

Adult assembly is required for this product.

Tool Required (included): 5 mm Allen wrench.

This package contains small parts which can be choking hazards.

Some parts may have sharp edges or sharp points.

Keep small parts away from children during assembly.

Installing the Front Wheel and Handlebar

- Keep children away while assembling.
- Insert the front fork and wheel middle tube into the front steering hub of the bicycle frame so that the front fork and wheel tube extends through the top of the front steering hub. See Figure 2.

NOTE: Make sure that the pointed side of the front fork and wheel support is pointed towards the rear of the bicycle. See Figure 3.

- Install the handlebar by inserting the two handlebar tubes into the two front fork and wheel tubes with the pointed side facing the rear. See Figure 4.
- Identify the washer and place it into the hole in the center of the handlebars (indentation down). See Figure 5.
- Identify the hexagonal screw and screw it into the hole in the center of the handlebars with the 5 mm Allen wrench. See Figure 6.
- Pull on the handlebars to make sure they are secure.

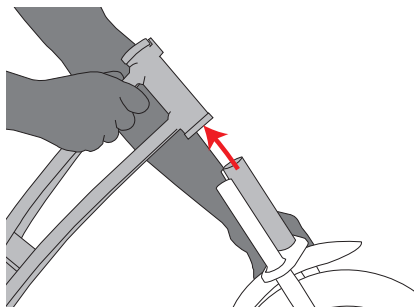


Figure 2

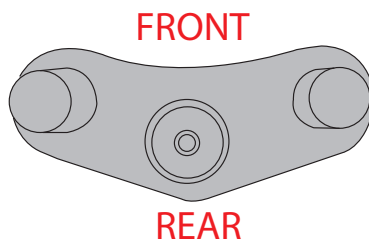


Figure 3

WARNING

Make sure screw on handlebar is tightened securely.

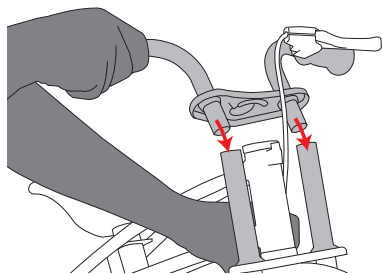


Figure 4

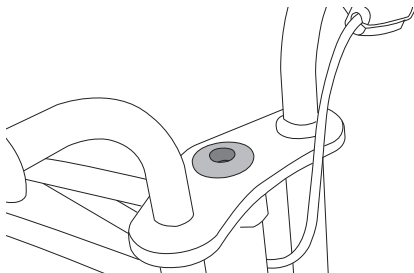


Figure 5

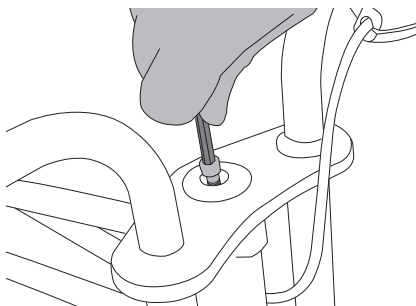


Figure 6

Tire Pressure

Make sure the tires are inflated to 30 PSI.

WARNING

Check and adjust tire pressure before riding.

Adjusting Balance Bike Seat

Check for the correct seat height by having your child sit on the seat. Make sure your child's feet touch the ground and your child is able to walk. There is a safety mark on the seat's tube (See Figure 7). Make sure the seat clamp doesn't go below the safety mark. If necessary, adjust the seat height in several steps in order to make sure that your child is comfortable on the balance bike. The correct seat height is essential for proper function. Check and adjust the seat height periodically

- Identify the black clamp under the seat and loosen the large hexagonal screw with the 5 mm Allen wrench. See Figure 8.
- Raise/lower on the seat to the desired height. See Figure 9.
- Firmly tighten the large hexagonal screw.
- Push and pull on the seat to make sure it is secure.

WARNING

Make sure screw on seat clamp is tightened securely.

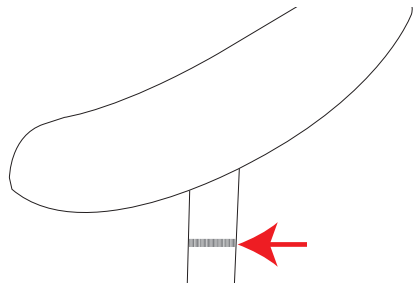


Figure 7

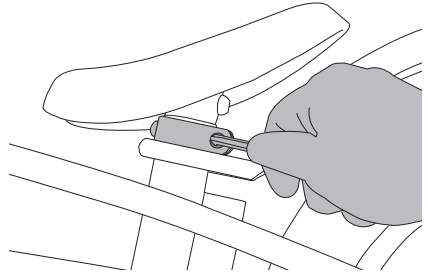


Figure 8

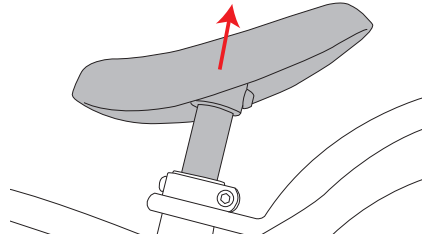


Figure 9

Brake Adjustment

IMPORTANT NOTE: It is very important for the correct operation of the hand brake that it be adjusted properly. Through normal use, the cable may loosen and require re-adjustment.

There are two adjustments for the rear brake, one on the brake handle and one on the rear wheel.

- To adjust the brake handle, use a Phillips head screwdriver to turn the screw clockwise to shorten the handles travel. Turn the screw counter clockwise to lengthen the handles travel. See Figure 10.

NOTE: Over tightening can cause the brake to engage prematurely.

- The brake adjustment on the rear wheel tightens the cable when you loosen the barrel adjuster. This will engage the brake quicker. Loosen the lock nut and turn the barrel adjuster counterclockwise. Re-tighten the lock nut. See Figure 11.

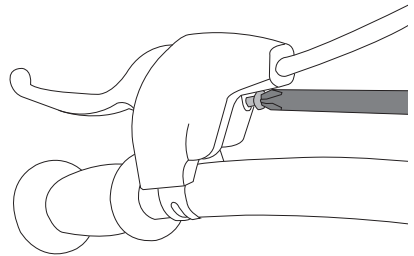


Figure 10

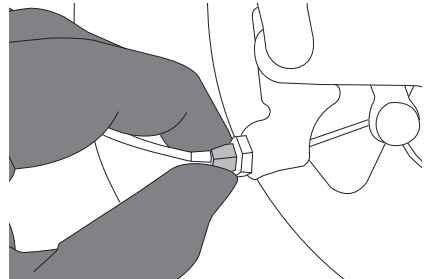


Figure 11

Using Your Balance Bike

It is important to make bicycle riding fun and safe. Be patient, find a good, safe area to practice and encourage your child at each step. It is never too early to teach your child about safety and responsibility. Follow these steps with your child to help them gradually become familiar with the bike:

- Please use a proper fitting helmet
- Allow your child to sit on the Bicycoo as soon as they are comfortable standing and walking
- Practice getting on and off the bike and sitting on the seat with feet flat on the floor (often it is easier for your child to straddle the bike and use the handlebars to lift the bike from between their legs)
- Also practice keeping hands on the handgrips and turning the front wheel
- Walking on the bike is the first step towards learning to ride. As your child gains confidence, encourage your child to bounce, roll, walk and scoot on the bike.
- Faster walking, better turns and bigger steps will come soon
- Practice squeezing the handbrake to help stop the Bicycoo. Many children don't use the handbrake until they are riding and gliding on the bike.

Don't rush your child, just make it fun!

Maintenance

All of the screws, clamps, and other hardware and plastic parts on the balance bike should be inspected periodically to ensure that they are secured properly and not damaged or malfunctioning. All moving parts, such as wheels and hinges should also be checked periodically to ensure they are operating properly.

Tires should be inflated to recommended pressure. See tire side wall for correct pressure. DO NOT overinflate the tires.

Any missing, broken, or worn components should be replaced immediately, and the balance bike should not be used until they are replaced. Only original manufacturer's components should be used. If needed, please contact Joovy at our toll-free phone number (877)456-5049.

Color fading may occur if the balance bike is left in direct sunlight for long periods of time. When not in use, store the balance bike out of direct sunlight.

Cleaning

The plastic and metal material on the balance bike can be cleaned using mild household soap or detergent and warm water on a sponge or clean cloth. Always allow to completely air dry before using the balance bike.

The frame and wheels should always be kept clean and free of dirt and foreign matter, especially after operating the balance bike in rain, snow, or other harsh environments. Use a sponge or cloth dampened with warm water and a mild household soap to clean the wheels after such use.

SATISFACTION GUARANTEED

We want you to be completely satisfied with your purchase of this product. Should you experience any difficulty in assembling or using this product, or if you have any questions, please contact our Customer Service Department at (877) 456-5049 between the hours of 8:30 am and 5:00 pm Central Time.



Joovy • 2919 Canton Street • Dallas, TX 75226 • (877) 456-5049 • Fax: (214) 761-1774
Email: customerservice@joovy.com • Web Site: www.joovy.com

©Joovy 2012 • Document Version 053012